

SPECIFICATION FOR APPROVAL

承认书

Customer (客户) : _____

Product Name (产品名称) : _____ 压电无源蜂鸣器引线 _____

Zhenmei Part No. 臻美(型号): _____ MIMS3055P2700 _____

Specification (规格) : _____ 30*5.5 _____

Customer's Model No. (客户型号) : _____

Specification No. (规格书编号) : _____ SQPE-17042402A1 _____

Number of the edition (版本号) : _____ A1 _____

CUSTOMER'S APPROVED SIGNATURE 客户承认盖章		



广东臻美智能电子科技有限公司

Guangdong zhenmei intelligent electronic technology co., ltd.

地址:广东省东莞市塘厦镇四村华新智慧工业园华新路 22 号

TEL: 400-659-1989 FAX:0769-82196690

Http: www.zhenmeigd.com

E-MAIL: sales888@zhenmeigd.com

Approved by 核准	Checked by 审核	Issued by 制成

SPECIFICATION FOR APPROVAL

承认书

PAGE NO.

页码

2/4

PART . NO.


产品型号

MIMS3055P2700


SPECIFICATION

1	Rated Voltage (V p-p)	9
2	Operating Voltage(V p-p)	1~20
3	Capacitance at 100Hz (nF)	50±30%
4	Resonant Frequency (Hz)	3500
5	Sound Output at 10cm (dB)	≥90
6	Current Consumption (mA)	≤5
7	Operating Temperature (°C)	-20~+70
8	Storage Temperature (°C)	-30~+80

DIMENSIONS: Unit: mm (线材: UL 1571 AWG 30) 红46 黑44

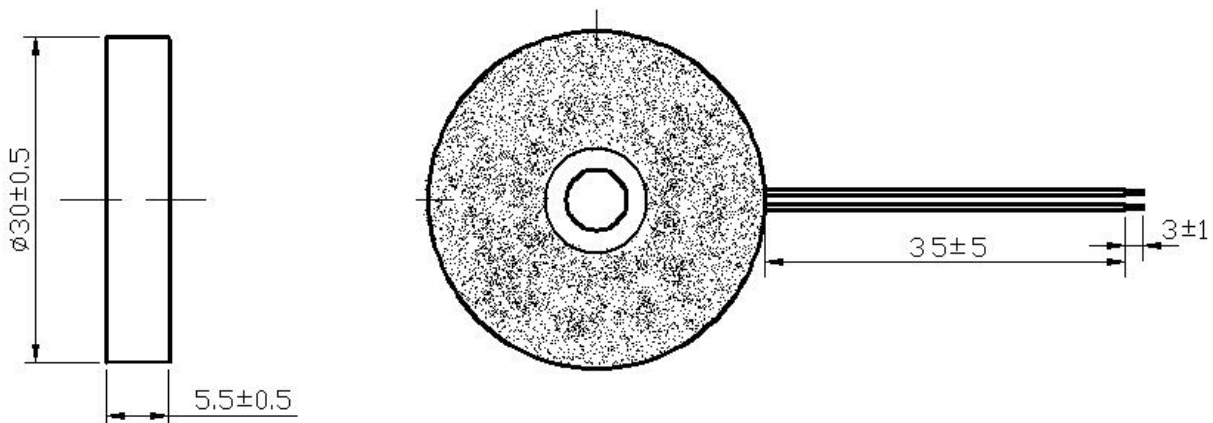

TEST METHOD:

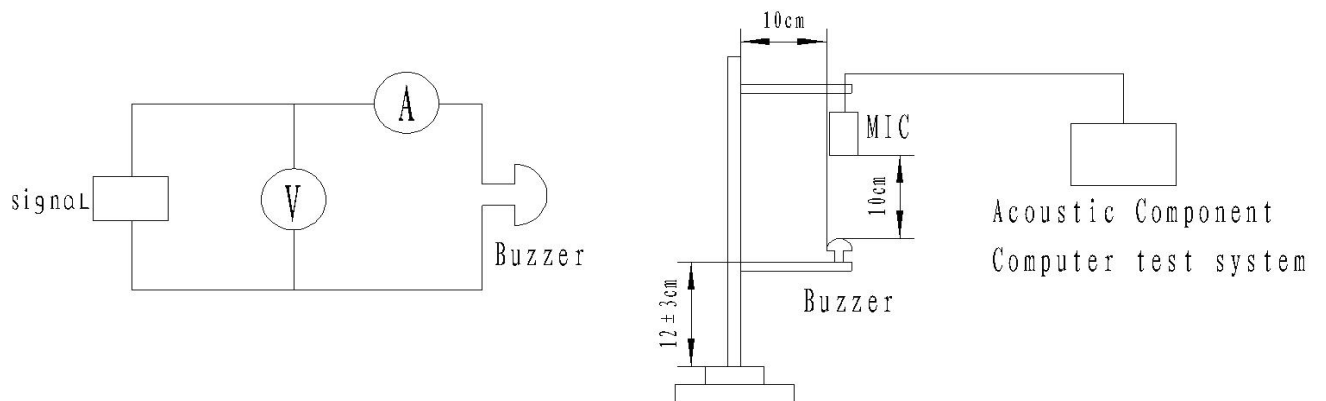

SPECIFICATION FOR APPROVAL 承认书	PAGE NO. 页码	3/4
	PART . NO. 产品型号	MIMS3055P2700

RELIABLY TEST:

NO.	ITEM	TESTING CONDITION	VARIANCE AFTER TEST
1	High temp.	The part shall be capable of withstanding a storage temperature is +85°C for 96 hours	After the test the part shall meet specifications without any degradation in appearance and performance except SPL shall be initial value ± 10dB or more.
2	Low temp.	The part shall be capable of withstanding a storage temperature is -40°C for 96 hours	
3	Temp. Cycle	Total 5 cycles, 1 cycle consisting of -40±2°C, 30 minutes 20±5°C 15 minutes 85±2°C, 30 minutes 20±5°C 15 minutes	
4	Humidity Test	40±2°C, 90~95% RH, 96 hours	
5	Vibration Test	The part shall be subjected to a vibration cycle is 10Hz in a period of 1 minute. Total peak amplitude shall be 1.52mm(9.3g). The vibration test shall consist of 2 hours per plane in each three mutually perpendicular planes for a total time of 6 hours.	
6	Shock	Sounder shall be measured after being applied shock for each three mutually perpendicular directions to each of 3 times by half sine wave.	
7	Drop Test	Dropped naturally from 700mm height onto the surface of 10mm thick wooden board. 2 directions-upper and side of the part are to be applied.	

Remark: ★ Instance Soldering Process

Buzzer Soldering process			Soldering Parameter		
			Temp.(°C)	Time(Sec.)	Times
Inclusive Lead		Wave soldering	245±5	3~6	1~2
		Manual soldering	330±10	1~2	1~2
Lead Free		Wave soldering	260±5	4~8	2~3
	★	Manual soldering	350±10	1~3	2~3

SPECIFICATION FOR APPROVAL

承认书

PAGE NO.

页码

4/4

PART. NO.

产品型号

MIMS3055P2700

SAMPLE TEST REPORT:

SPE.	SPL(dB)	Co(nF)	I(mA)	Important Dimensions:mm			
	≥90	50±30%	≤5.0	30±0.5	5.5±0.5	35±5	
1	95	54.9	0.4	29.85	5.54	35	
2	95	55.6	0.5	29.85	5.56	37	
3	97	55.5	0.6	29.92	5.55	36	
4	95	54.8	0.4	30.00	5.53	36	
5	85	54.6	0.6	29.86	5.54	35	
6	95	55.2	0.6	29.88	5.56	37	
7	96	55.3	0.5	29.85	5.55	36	
8	97	55.4	0.7	29.96	5.50	36	
9	95	54.9	0.6	29.95	5.56	36	
10	96	55.2	0.5	29.95	5.55	35	
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
AVE.	95.6	55.4	0.5	29.90	5.54	36	
MAX.	97.0	55.6	0.7	30.00	5.56	37	
MIN.	95.0	54.6	0.4	29.85	5.50	35	
Remark:							
Conclusion:	Pass(<input checked="" type="checkbox"/>)			Fail(<input type="checkbox"/>)			